



LDMH 1000, 1250, 1500, 1750

Midship Mounted Pump

Specifications



Warranty

- 10 year limited warranty



Dimensions & Weight

- 46" L x 84" W x 44" H
- 1,340 lbs. (608 kg)




Applications

- Aerial, pumper, pumper tanker, rescue pumper, tanker



Standard Features

- High pressure booster pump (rated 1500 gpm max.)
- 4 - 2 $\frac{1}{2}$ " NH, $\frac{1}{4}$ turn, ball, self-locking valves and caps, mounted
- 2 - 5" or 6" NH suction adapters and caps
- Choice of 1 $\frac{1}{2}$ ", 2 $\frac{1}{2}$ " or 3" companion flanges, discharge or suction (as needed)
- 1610 or 1710 full round yokes standard
- Air shift
- 2 $\frac{1}{2}$ " driveline, 12 $\frac{1}{4}$ " driveline drop

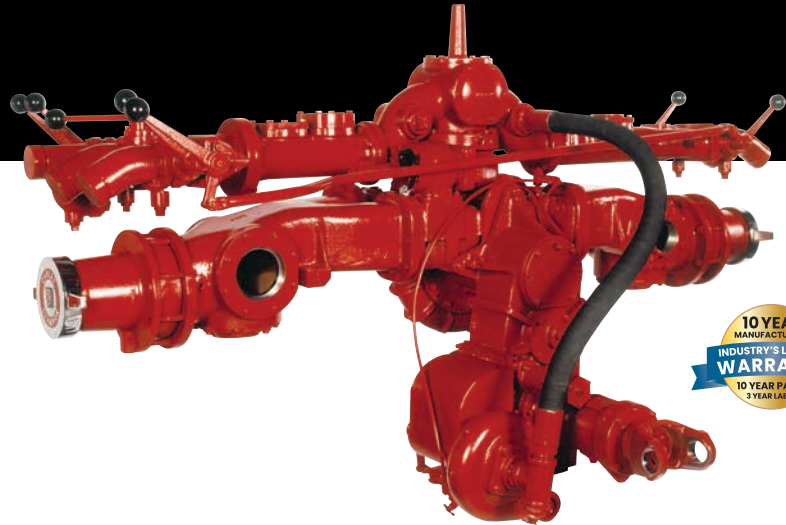

One, Two & Three Stage, Centrifugal, Midship Mounted

LDMH 1000

1000 gpm (3785 L/M) @ 150 psi (10.3 bar)
700 gpm (2646 L/M) @ 200 psi (13.8 bar)
500 gpm (1893 L/M) @ 250 psi (17.2 bar)

LDMH 1250

1250 gpm (4731 L/M) @ 150 psi (10.3 bar)
875 gpm (3312 L/M) @ 200 psi (13.8 bar)
625 gpm (2365 L/M) @ 250 psi (17.2 bar)

LDMH 1500

1500 gpm (5678 L/M) @ 150 psi (10.3 bar)
1050 gpm (3974 L/M) @ 200 psi (13.8 bar)
750 gpm (2839 L/M) @ 250 psi (17.2 bar)

LDMH 1750

1750 gpm (6624 L/M) @ 150 psi (10.3 bar)
1225 gpm (4637 L/M) @ 200 psi (13.8 bar)
875 gpm (3312 L/M) @ 250 psi (17.2 bar)

HIGH PRESSURE

200 gpm (757 L/M) @ 400 psi (27.6 bar)
100 gpm (379 L/M) @ 600 psi (41.3 bar)



darley.com/product/ldmh-1000-1250-1500-1750/
800.323.0244

